



DB WIRE CONNECTOR

Connections Made Easy

- Used for electrical connections in low voltage installations (< 30V)
- Allows electrical connections up to 3 wires sized 4mm²
- Waterproof



FEATURES

• Reliability

- Integrated one-piece design and integrated wire nut ensures reliable connection in one step
- The Strain Relief ensures wires are secure and won't pull apart
- Waterproof silicone sealant protects against corrosion
- U.V. material ensures product performance does not degrade even after long periods of exposure to sunlight

SPECIFICATIONS

Maximum wire voltage: 30V

MODEL


DB0025



DBR/Y-6

Direct Bury Wire Connectors

- Used for electrical connections in low voltage installations (< 30V)
- One unique reference, up to 3 wires sized 6mm²
- Waterproof

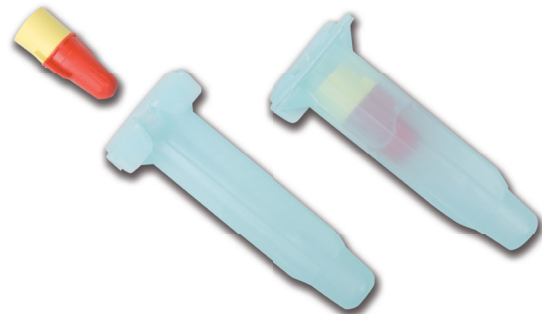

FEATURES

• Ease of Use

- Connect solid or stranded copper wire
- Transparent body – Help to check if electrical connections are correctly made

• Reliability

- The DBR/Y-6 kit includes a Performance Plus Wire Connector (R/Y+) and a high impact, UV-resistant polypropylene tube prefilled with moisture-resistant grease

SPECIFICATIONS

Maximum wire voltage: 30V

MODEL

DBR/Y-6 kit



EXAMPLE OF WIRE COMBINATION

Conductor Combination	Wire Combination		Type
	Quantity	Size	
	5-7	0,5 mm ²	Solid/Stranded
	3-7	0,75 mm ²	
	2-8	1,0 mm ²	
	2-7	1,5 mm ²	
	2-5	2,5 mm ²	
	2-4	4,0 mm ²	
	2	6,0 mm ²	



DBM

“Quick Connect Wire Connectors”

- Used for electrical connections in low voltage installations (< 30V)
- Allows electrical connections up to 3 wires sized 1.5mm²
- Moisture-resistant and compact size

SPECIFICATIONS

Maximum wire voltage: 30V
Self-stripping. Use with insulated copper wire

MODELS

DBM



KING

Waterproof Wire Connectors

- Used for electrical connections in low voltage installations (< 30V)
- Allows electrical connections up to 2 wires sized 2,5mm² or 3 wires sized 1,5mm²
- Waterproof

FEATURES

- **Reliability**
 - Spring locks on to wire for tight grip
 - Eliminates failures due to moisture and corrosion
 - Arrests sparking
 - Copper-to-copper wire only. Cannot be reused

SPECIFICATIONS

Maximum wire voltage: 30V

MODELS

KING

